

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 031 854 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
30.08.2000 Bulletin 2000/35

(51) Int Cl<sup>7</sup>: G01T 1/29

(21) Application number: 00103722.5

(22) Date of filing: 22.02.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Iwabuchi, Yasuo,  
Fuji Photo Film Co., Ltd.  
Ashigara-kami-gun, Kanagawa, 258-8538 (JP)

(30) Priority: 22.02.1999 JP 4332899

(74) Representative:  
Klunker, Schmitt-Nilson, Hirsch  
Winzerstrasse 106  
80797 München (DE)

(71) Applicant: FUJI PHOTO FILM CO., LTD.  
Kanagawa-ken, 250-0123 (JP)

(54) Method for processing electric signals of radiographic image recorded in stimuable phosphor sheet

(57) A method for processing electric signals of a radiographic image which are obtained by the steps of scanning a stimulating light beam on a stimuable phosphor sheet comprising a stimulating light-reflective or -absorbent grid and stimuable phosphor-containing microcells surrounded by the grid and having a radiographic image recorded therein in a direction along the grid and photoelectrically collecting in sequence stimulated emissions emitting from the microcells, is favora-

bly performed by detecting a signal of a grid surrounding a microcell and a signal strength corresponding to the microcell surrounded by the grid; determining a correcting value for the detected signal strength; repeating the step of determining a correcting value for a signal strength in each microcell; and processing each signal strength detected in each microcell using each correcting value determined in each microcell, in consideration of a predetermined pixel size of the radiographic image, to obtain a corrected radiographic image data.

EP 1 031 854 A1

## Description

### FIELD OF THE INVENTION

[0001] This invention relates to a method for processing electric signals of a radiographic image recorded in a stimuable phosphor sheet, which is favorably employed for reproduction of a radiographic image in a radiographic image recording and reproducing method.

### BACKGROUND OF THE INVENTION

[0002] As a method replacing a conventional radiography using a combination of a radiographic film and radiographic intensifying screen, a radiation image recording and reproducing method utilizing a stimuable phosphor is practically employed. This method employs a stimuable phosphor sheet (i.e., radiation image storage panel) comprising a stimuable phosphor, and comprises the steps of causing the stimuable phosphor to absorb radiation energy having passed through an object or having radiated from an object; sequentially exciting the stimuable phosphor with an electromagnetic wave such as visible light or infrared rays (hereinafter referred to as "stimulating rays") to release the radiation energy stored in the phosphor as light emission (i.e., stimulated emission); photoelectrically detecting the emitted light to obtain electric signals; and reproducing the radiation image of the object as a visible image from the electric signals. The phosphor sheet thus processed is then subjected to a step for erasing a radiation image remaining therein, and then stored for the next radiation image recording and reproducing procedure. Thus, the stimuable phosphor sheet can be repeatedly employed.

[0003] In general, a support and a protective film are provided on the top and bottom surfaces of the stimuable phosphor sheet, respectively. The stimuable phosphor sheet usually comprises a binder and stimuable phosphor particles dispersed therein, but it may consist of agglomerated phosphor without binder. The stimuable phosphor sheet containing no binder can be formed by deposition process or firing process. Further, the stimuable phosphor sheet comprising agglomerated phosphor soaked with a polymer is also known.

[0004] The radiation image recording and reproducing method is often used as X-ray radiography for medical diagnosis. In that case, it is especially desired to obtain a radiation image of high quality (particularly, high sharpness for high resolution) by applying a small dose of radiation. Therefore, the stimuable phosphor sheet is required to have a high sensitivity and to provide an image of high quality.

[0005] The sharpness of radiation image is mainly affected by diffusion or scattering of the stimulating rays in the stimuable phosphor sheet in the case that the reading process is performed by the steps of sequentially scanning the stimulating rays to divide the plane of the phosphor sheet into plural pixels, and detecting the

stimulated emission by a photodetector. In this process, the procedure for reading the latent image comprises the steps of sequentially applying a light beam of the stimulating rays onto the surface of the phosphor sheet to induce the stimulated emission, and successively collecting and detecting the emission. If the stimulating rays diffuse or scatter on the place of the phosphor sheet, the stimulating rays excite the stimuable phosphor not only at the target pixel but also in its adjacent pixels. Consequently, the stimulated emission emitted from the target pixel is contaminated with that from the adjacent pixels. The contamination of the emission impairs the sharpness of the reproduced radiographic image.

[0006] For avoiding the diffusion or scattering of the stimulating ray in the stimuable phosphor sheet, it has been proposed to divide a plane of the stimuable phosphor sheet into small physically divided sections (microcells) with a partition reflecting or absorbing the stimulating rays.

[0007] Japanese Patent Provisional Publication No. 59-202100 discloses a stimuable phosphor sheet having a honey-comb structure consisting of a great number of microcells filled with stimuable phosphor. This phosphor sheet comprises a substrate and a stimuable phosphor layer provided thereon, and the honey-comb structure sectioned with a partition is further provided on the phosphor layer.

[0008] Japanese Patent Provisional Publication No. 9-15396 describes a stimuable phosphor sheet which comprises a grid having openings with a size larger than a beam spot of stimulating rays to define an emitting area of one pixel by the grid opening so that the resulting radiation image can have a high space resolution.

[0009] According to the study of the present inventor, the stimuable phosphor sheet comprising a grid and plural microcells surrounded by the grid in its stimuable phosphor layer generally has nonuniformity in the sensitivity on the respective microcells. The nonuniformity of sensitivity is caused by nonuniformity of the phosphor layer which is prepared by coating a stimuable phosphor-containing solution on a plane having a grid thereon.

[0010] The stimuable phosphor sheet having non-uniform sensitivity gives a reproduced radiation image of low quality because it has a structure noise due to nonuniformity of the sensitive material. Moreover, if the scanning space (space between one scanning line and next scanning line) is not identical to the sizes of microcells, a moire (i.e., a pattern of interfering stripes) is observed on the reproduced radiation image, to reduce the quality of the radiation image.

### SUMMARY OF THE INVENTION

[0011] An object of the present invention is to provide a method for processing electric signals of a radiographic image recorded in a stimuable phosphor sheet having

microcells, to reproduce the radiographic image with high image quality.

[0012] The present invention resides in a method for processing electric signals of a radiographic image which are obtained by the steps of scanning a stimulating light beam on a stimuable phosphor sheet comprising a stimulating light-reflective or light-absorbent grid and stimuable phosphor-containing microcells surrounded by the grid and having a radiographic image recorded therein in a direction along the grid and photoelectrically collecting in sequence stimulated emissions emitting from the stimuable phosphor-containing microcells, which comprises the steps of:

- (1) detecting a signal of a grid surrounding a microcell and a signal strength  $I$  corresponding to the microcell surrounded by the grid, so as to determine a signal strength  $I(x,y)$  in a microcell residing in a position  $(x,y)$  which is determined from a size information of the stimuable phosphor sheet and an order of the detected signal corresponding to the grid;
- (2) determining a correcting value for the signal strength  $I(x,y)$  according to the following formula:

$$\text{correcting value} = I(x,y)/I_0(x,y)$$

wherein  $I_0(x,y)$  is a base sensitivity strength which is predetermined in the microcell residing in the position  $(x,y)$ ;

and

- (3) processing each signal strength detected in each microcell using each correcting value determined in each microcell, in consideration of a predetermined pixel size of the radiographic image, to obtain a corrected radiographic image data.

[0013] In the above-described method of the invention, the step (3) for processing each signal strength detected in each microcell comprises, if the pixel size is larger than the size of microcell and the pixel comprises plural microcells, obtaining an average of correcting values of the microcells and using the average correcting value for the pixel comprising plural microcells.

[0014] Otherwise, if the pixel size is equal to or smaller than the size of microcell, the step (3) for processing each signal strength detected in each microcell is performed using a correcting value which is determined from the correcting value of the microcell, in consideration with correcting values of its adjacent microcells.

#### BRIEF DESCRIPTION OF DRAWINGS

[0015] Fig. 1 is a sectional view of a stimuable phosphor sheet having microcells surrounded by grid.

[0016] Fig. 2 is a plane view of the stimuable phosphor sheet of Fig. 1.

[0017] Fig. 3 graphically illustrates electric signals

read out of the stimuable phosphor sheet.

[0018] Fig. 4 schematically illustrates relationships between the pixel size and the microcell size.

#### DETAILED DESCRIPTION OF THE INVENTION

[0019] The method for processing electric signals of a radiographic image recorded in a stimuable phosphor sheet according to the present invention is further described by referring to the figures shown in the attached drawings.

[0020] Fig. 1 and Fig. 2 together indicate a stimuable phosphor sheet having microcells surrounded by grid.

[0021] The stimuable phosphor sheet 1 comprises a stimulating light-reflective or light-absorbent grid 2 and stimuable phosphor-containing microcells 3 surrounded by the grid 2. Under the grid 2 and microcells 3 are provided a support film 4. On the grid 2 and microcells 3 are placed a transparent protective film 5. The grid 2 is generally made of metal or plastic resin. The microcells 3 comprise stimuable phosphor particles and a binder. The stimuable phosphor sheet 1 has a thickness of, generally, 20  $\mu\text{m}$  to 1 mm, preferably 50  $\mu\text{m}$  to 500  $\mu\text{m}$ . The grid 2 preferably has a thickness of 1  $\mu\text{m}$  to 50  $\mu\text{m}$ , and the microcell 3 preferably has a width or a length in the range of 10  $\mu\text{m}$  to 500  $\mu\text{m}$ . Known stimuable phosphor sheets having a grid and stimuable phosphor-containing area surrounded by the grid are also employable for performing the method for processing electric signals of a radiographic image according to the invention.

[0022] In the present specification, the stimulating light-reflective grid means a grid reflecting or scattering the stimulating light beam well. Examples of the materials of the stimulating light-reflective grid include glass, ceramic material and plastic material (i.e., resin material). For enhancing the reflection, resin material containing a great number of light-reflecting particles such as white pigments (e.g., titanium dioxide particles, barium sulfate particles) are also employable. A thin film reflecting the stimulating light beam may be provided between the grid and the microcells, so as to further enhance the reflection.

[0023] As the stimuable phosphor incorporated into the microcell, a phosphor giving a stimulated emission of a wavelength in the range of 300 to 500 nm when it is irradiated with a stimulating light beam of a wavelength in the range of 400 to 900 nm is preferably employed. In Japanese Patent Provisional Publications No. 2-193100 and No. 4-310900, some examples of the stimuable phosphors are described in detail. Examples of the preferred phosphors include divalent europium or cerium activated alkaline earth metal halide phosphors, and cerium activated oxyhalide phosphors.

[0024] The stimuable phosphor is usually used in the form of particles. The phosphor particles and a binder are well mixed in an appropriate solvent to give a coating dispersion for preparing the phosphor sheet.

[0025] The stimuable phosphor sheet of the invention can be produced, for example, in the following manner.

[0026] First, a sheet of stimulating light-reflective material is placed and fixed on a support with an adhesive to prepare a stimulating light-reflective layer. On the stimulating light-reflective layer, a light-sensitive dry film was placed and fixed. Thus formed layered composition is then exposed to light through a photo mask, and developed. The exposed areas of the light-sensitive dry film are etched out to prepare a grid of stimulating light-reflective material.

[0027] Independently a flexible phosphor sheet is prepared from a coating dispersion comprising stimuable phosphor particles and a binder. The prepared sheet is placed on the grid, and pressed or heated to sink into the areas (i.e., microcells) in the grid. Thus, a stimuable phosphor sheet is produced. The pressed flexible sheet may be peeled off, and the formed gaps may be filled with the stimulating light-reflective material. Further, the microcells surrounded by the grid may be filled with the coating dispersion to produce the stimuable phosphor sheet. Otherwise, the microcells may be filled with a stimuable phosphor, and then the firing procedure may be performed to produce the stimuable phosphor sheet. The stimuable phosphor sheet can be also produced by depositing a stimuable phosphor in the microcells surrounded by the grid.

[0028] The electric signals to be processed by the method of the invention are obtained from the stimuable phosphor sheet 1, for instance, by irradiating the phosphor sheet with a radiation (such as X-rays) having passed through an object or having radiated from an object to record a radiation image of the object in the form of latent image; scanning the stimuable phosphor sheet with a stimulating light beam to release the radiation image as light emission (i.e., stimulated emission); and photoelectrically detecting the emitted light.

[0029] In Fig. 2, the step of scanning the stimuable phosphor sheet with a stimulating light beam is illustrated. The stimulating light beam is scanned on the stimuable phosphor-containing microcells 3 in the direction of "arrow" along the one-dimensional partition of the grid 2 as is shown by numeral 6. The microcell 3 scanned with the stimulating light beam 6 emits a stimulated emission in an amount proportional to a radiation energy recorded (or stored) therein. The stimulated emission is collected and converted into the corresponding electric signals in a photoelectric converting means (e.g., photomultiplier). The electric signals are then transferred to a signal processing means to perform the signal processing of the invention.

[0030] The method of the signal processing according to the invention is further described in more detail.

#### (1) Detection of Signal Strength $I(x,y)$ of Microcell

[0031] In Fig. 3, a series of electric signals are graphically illustrated, in which the axis of abscissas means

a position and the axis of ordinates means a signal strength  $I$ . In the graph of Fig. 3, the signals of a stimulating light beam-reflective grid is observed as a regularly-appearing sharp depression. The desired signal strength  $I$  of a microcell is detected between the adjoining two grid signals. Then, the coordinate  $(x,y)$  of the microcell for which the signal strength  $I$  is detected is determined from the order of the detected grid and the size information of the stimuable phosphor sheet (and/or grid). Thus, a signal strength  $I(x,y)$  of a microcell  $(x,y)$  is obtained.

#### (2) Structural Correction

[0032] In advance of performing the radiographic image recording and reproducing method, the base sensitivity  $I_0(x,y)$  of each microcell  $(x,y)$  of the stimuable phosphor sheet is determined. For the determination of the base sensitivity, the overall surface of the stimuable phosphor sheet is uniformly irradiated with X-rays, and scanned in the same manner as above to obtain a base sensitivity of each microcell. The base sensitivity values slightly vary depending on the positions of microcells, because it is difficult to coat uniformly a stimuable phosphor-containing dispersion on a support film having a grid thereon.

[0033] The correction of sensitivity is performed using a correcting value which is obtained by the following equation, using the signal strength  $I(x,y)$  and the corresponding base sensitivity  $I_0(x,y)$ :

$$\text{correcting value} = I(x,y)/I_0(x,y)$$

[0034] In the structural correction,  $I(x,y)$  detected in each microcell is corrected using the above-obtained correcting value. Thus, the radiographic image which has been subjected to structural correction and therefore which has reduced noises originating from nonuniformity of the stimuable phosphor sheet is reproduced.

#### (3) Processing on Moire

[0035] The correcting value obtained above for each microcell is processed to obviate appearance of moire which is produced by dividing a stimuable phosphor sheet into regularly arranged multiple microcells. The processing is performed appropriately in consideration of a size of the microcell and a pixel size for reproduction of the radiation image.

[0036] Fig. 4 shows two figures for schematically illustrating two cases of relationship between the microcell size and the pixel size. Fig. 4(1) stands for the case in which the pixel size is larger than the microcell size. Fig. 4(2) stands for the case in which the pixel size is smaller than the microcell size.

[0037] In the case of Fig. 4(1) [pixel size > microcell size], correcting values of plural microcells [in shadow

area] embraced in the target pixel [in thick square] are calculated to give an average correcting value, and thus obtained average correcting value is adopted for correction. If the pixel embraces a portion of one or more microcells, appropriate arithmetical operations such as round-up, round-off, weighted calculation can be done.

[0038] In the case of Fig. 4(2) [pixel size < microcell size] or in the case that the pixel size is identical to the microcell size, an appropriate correcting value is obtained from the correcting value for the corresponding microcell and the correcting values for the microcells adjacent to the target microcell. In the case of Fig. 4(2), the correcting values of the shadowed microcells are submitted to calculation to give an appropriate correcting value for the target pixel [in thick square]. Even in this case, appropriate arithmetical operations such as weighted calculation can be done. In consideration of the difference between the microcell and the pixel, and positional relationship.

[0039] The above-described corrections are effective to give a radiographic image without moire.

[0040] The radiographic image can be reproduced using a known displaying device, such as CRT or a photosensitive film. The radiographic image can be stored in other memory devices such as an optical recording disc and a magnetic recording disc.

#### Claims

1. A method for processing electric signals of a radiographic image which are obtained by the steps of scanning a stimulating light beam on a stimuable phosphor sheet comprising a stimulating light-reflective or light-absorbent grid and stimuable phosphor-containing microcells surrounded by the grid and having a radiographic image recorded therein in a direction along the grid and photoelectrically collecting in sequence stimulated emissions emitting from the stimuable phosphor-containing microcells, which comprises the steps of:

detecting a signal of a grid surrounding a microcell and a signal strength  $I$  corresponding to the microcell surrounded by the grid, so as to determine a signal strength  $I(x,y)$  in a microcell residing in a position  $(x,y)$  which is determined from a size information of the stimuable phosphor sheet and an order of the detected signal corresponding to the grid;

determining a correcting value for the signal strength  $I(x,y)$  according to the following formula:

$$\text{correcting value} = I(x,y)/I_0(x,y)$$

wherein  $I_0(x,y)$  is a base sensitivity strength

which is predetermined in the microcell residing in the position  $(x,y)$ ;

and processing each signal strength detected in each microcell using each correcting value determined in each microcell, in consideration of a predetermined pixel size of the radiographic image, to obtain a corrected radiographic image data.

2. The method of claim 1, wherein the last step for processing each signal strength detected in each microcell comprises, if the pixel size is larger than the size of microcell and the pixel comprises plural microcells, obtaining an average of correcting values of the microcells and using the average correcting value for the pixel comprising plural microcells.
3. The method of claim 1, wherein the last step for processing each signal strength detected in each microcell comprises, if the pixel size is equal to or smaller than the size of microcell, using a correcting value which is determined from the correcting value of the microcell, in consideration with correcting values of its adjacent microcells.

FIG. 1




FIG. 2




FIG. 3



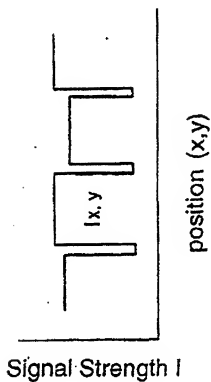


FIG. 4

(1)



(2)







European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 3722

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claims	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
0, A	US 4 752 557 A (TSUCHINO HISANORI ET AL) 21 June 1988 (1988-06-21) * abstract * * column 3, line 21 - column 5, line 32 * * column 8, line 21 - column 9, line 15 * * figures *	1-3	G01T1/29
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 127 (P-1185), 27 March 1991 (1991-03-27) & JP 03 012785 A (FUJI PHOTO FILM CO LTD), 21 January 1991 (1991-01-21) * abstract *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 320 (P-1238), 15 August 1991 (1991-08-15) & JP 03 114039 A (FUJI PHOTO FILM CO LTD), 15 May 1991 (1991-05-15) * abstract *	1	
A	US 4 688 242 A (EMA TAKEHIRO) 18 August 1987 (1987-08-18) * column 2, line 65 - column 3, line 56 * * column 4, line 25 - line 68 * * figures *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  G01T
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>14 June 2000</b>	Examiner <b>Datta, S</b>
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons A: member of the same patent family, corresponding document	

EPO FORM 1509 (01.01.94) (P4/C21)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 00 10 3722

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on the European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-06-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4752557 A	21-06-1988	JP 1911360 C	09-03-1995
		JP 4034715 B	08-06-1992
		JP 59202100 A	15-11-1984
		DE 3475848 D	02-02-1989
		EP 0126564 A	28-11-1984
JP 03012785 A	21-01-1991	DE 69031478 D	30-10-1997
		DE 69031478 T	05-02-1998
		EP 0392504 A	17-10-1990
		EP 0792060 A	27-08-1997
		EP 0792061 A	27-08-1997
		US 5028784 A	02-07-1991
JP 03114039 A	15-05-1991	DE 69031478 D	30-10-1997
		DE 69031478 T	05-02-1998
		EP 0392504 A	17-10-1990
		EP 0792060 A	27-08-1997
		EP 0792061 A	27-08-1997
		JP 2754068 B	20-05-1998
		US 5028784 A	02-07-1991
US 4688242 A	18-08-1987	JP 61249452 A	06-11-1986
		US 4837796 A	06-06-1989

EPO FORM P/MS

For more details about this annex: see Official Journal of the European Patent Office, No. 12/82